



SMD Magnetic Buzzer

SFM-1324S05

Rev.2



FEATURES:

- This Item Is Designed For Surface Mounting Applications
- The Pin Is Plated With Tin, Which Can Meet The Request of Re-flow Soldering Process at 260°C For 30 Seconds.



APPLICATIONS:

- Miniature Electronic Device

CHARACTERISTICS:

DIMENSIONS:(Unit: mm)

SFM-TERMINAL RECOMMENDED VERSION SMD FOOT PATTERN

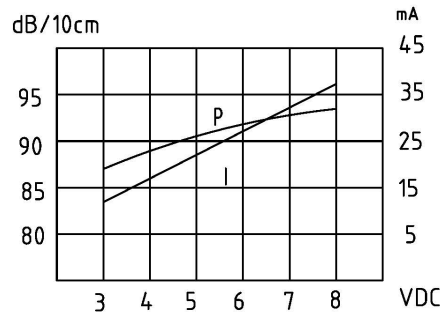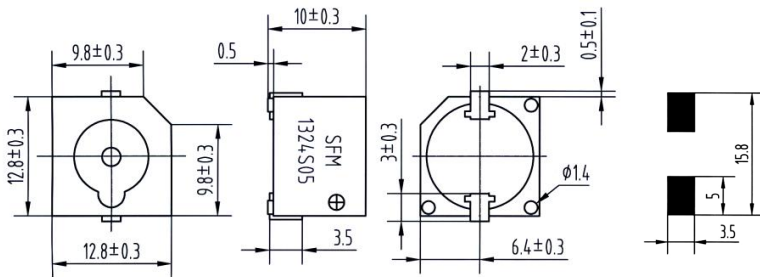

ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at

5V _{DC} /10cm.....	85dB
Rated Voltage.....	5V _{DC}
Operating Voltage.....	4~7V _{DC}
Max. Consumption.....	30mA/5V _{DC}
Oscillating Frequency.....	2300±300Hz
Operating Temperature.....	-20~+105°C
Storage Temperature.....	-30~+105°C
Housing Material.....	PPS
Weight.....	2g

PACKING INFORMATION:

Packing: 2500 pcs per export carton
Carton Size: 40×35×35 cm

G. Weight: 11 kgs N. Weight: 6.3 kgs

Address: No. 12. Lane 722. Sangtian Road Jiangdong, Ningbo, 315040 P. R. China

Sales Tel: +86-574-87809820(International)/87805605(Domestic)

Fax: +86-574-87803761

