



### SMD Magnetic Buzzer

RoHS  
Compliant

## SFM-1324S12

Rev.2



#### FEATURES:

- This Item Is Designed For Surface Mounting Applications
- The Pin Is Plated With Tin, Which Can Meet The Request of Re-flow Soldering Process at 260°C For 30 Seconds.



#### APPLICATIONS:

- Communication Equipment
- Miniature Electronic Device

#### DIMENSIONS:( Unit: mm)

#### CHARACTERISTICS:

#### SFM-TERMINAL RECOMMENDED VERSION SMD FOOT PATTERN

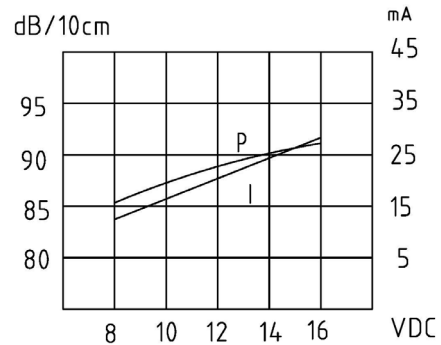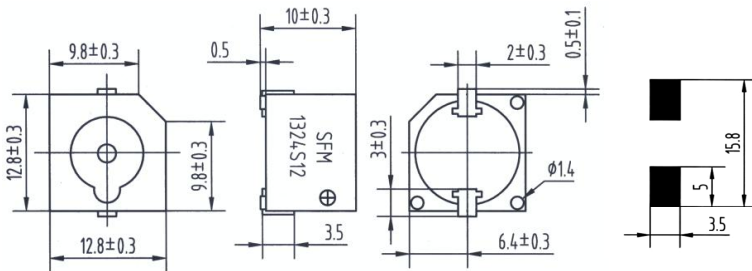

#### ELECTRICAL SPECIFICATIONS:

Min. Sound Pressure Level at

12V <sub>DC</sub> /10cm.....	90dB
Rated Voltage.....	12V <sub>DC</sub>
Operating Voltage.....	8~15V <sub>DC</sub>
Max. Consumption.....	30mA/12V <sub>DC</sub>
Oscillating Frequency.....	2300±300Hz
Operating Temperature.....	-20~+70°C
Storage Temperature.....	-30~+105°C
Housing Material.....	PPS
Weight.....	2.5g

#### PACKING INFORMATION:

Packing: 2500 pcs per export carton  
Carton Size: 40×35×35 cm

G. Weight: 11 kgs N. Weight: 6.3 kgs

Address: No. 12. Lane 722. Sangtian Road Jiangdong, Ningbo, 315040 P. R. China

Sales Tel: +86-574-87809820(International)/87805605(Domestic)

Fax: +86-574-87803761

