


## SMD Power Inductor – SDIA

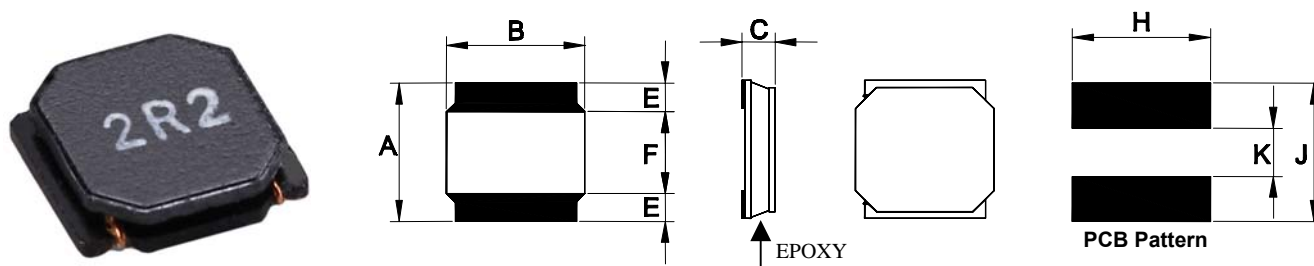

### Dimensions

Unit: mm

Type	A	B	C max.	E	F	H	J	K
SDIA0310	3.0±0.2	3.0±0.2	1.0	-	0.9±0.2	1.9±0.2	-	2.7
SDIA0312	3.0±0.2	3.0±0.2	1.25	-	0.9±0.2	1.9±0.2	-	2.7
SDIA0315	3.0±0.2	3.0±0.2	1.5	-	0.9±0.2	1.9±0.2	-	2.7
SDIA0410	4.0±0.2	4.0±0.2	1.0	-	1.1±0.2	2.5±0.2	-	3.7
SDIA0418	4.0±0.2	4.0±0.2	1.8	-	1.1±0.2	2.5±0.2	-	3.7
SDIA0520	5.0±0.2	5.0±0.2	2.0	2.3±0.3	1.25±0.2	3.6±0.2	0.3±0.2	4.7
SDIA0528	5.0±0.2	5.0±0.2	2.8	2.3±0.3	1.25±0.2	3.6±0.2	0.3±0.2	4.7
SDIA0610	6.0±0.2	6.0±0.2	1.0	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7
SDIA0612	6.0±0.2	6.0±0.2	1.2	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7
SDIA0620	6.0±0.2	6.0±0.2	2.0	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7
SDIA0628	6.0±0.2	6.0±0.2	2.8	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7
SDIA0645	6.0±0.2	6.0±0.2	4.5	2.3±0.3	1.35±0.2	4.0±0.2	0.3±0.2	5.7
SDIA0840	8.0±0.2	8.0±0.2	4.2	-	1.6±0.3	5.6±0.3	-	7.5

### Features

- Small and Low profile inductor
- It corresponds to high current
- Shield structure magnetically
- Strong structure against a shock-proof

### Applications

- LCD Display etc.
- For Small DC to DC Converters
- PDA

### Characteristics

- Rated DC Current: The current when the inductance becomes 30% lower than its initial value.
- Operating temperature range: -40~85°C

### Inductance and rated current ranges

- SDIA0310 1.5~22μH 1.20~0.35A
- SDIA0312 1.5~47μH 1.36~0.25A
- SDIA0315 2.2~47μH 1.48~0.32A
- SDIA0410 1.0~47μH 1.80~0.24A
- SDIA0418 1.0~220μH 4.00~0.27A
- SDIA0520 2.2~10μH 5.20~2.40A
- SDIA0528 2.2~470μH 6.00~0.40A
- SDIA0610 4.7~10μH 1.80~1.40A
- SDIA0612 2.2~10μH 3.10~1.40A
- SDIA0620 1.0~10μH 6.80~1.90A
- SDIA0628 0.9~100μH 6.60~0.62A
- SDIA0645 1.0~100μH 8.50~0.80A
- SDIA0840 0.9~100μH 11.0~1.00A
- Electrical specifications at 25°C

## Product Identification

SDIA	0312	M	T	101
Product Type	Dimensions (AxC)	Inductor Tolerance	Packaging Style	Inductance
	0310: 3.0x1.0 0312: 3.0x1.25 0315: 3.0x1.5 0410: 4.0x1.0 0418: 4.0x1.8 0520: 5.0x2.0 0528: 5.0x2.8 0610: 6.0x1.0 0612: 6.0x1.2 0620: 6.0x2.0 0628: 6.0x2.8 0645: 6.0x4.5 0840: 8.0x4.0	M: $\pm 20\%$ N: $\pm 30\%$	T: Tape and Reel	1R1: 1.1 $\mu$ H 470: 47 $\mu$ H 101: 100 $\mu$ H

## Electrical Characteristics

SDIA0310 / 0312 / 0315 / 0410 Type

Codes	L ( $\mu$ H)	Tolerance		Test Condition	DCR ( $\Omega$ ) max.				IDC (A) max.			
		0310 0312 0315	0410		0310	0312	0315	0410	0310	0312	0315	0410
1R0	1.0	N	N	100KHz, 0.25V	-	-	-	0.100	-	-	-	1.80
1R5	1.5	N	N	100KHz, 0.25V	0.080	0.060	-	-	1.20	1.360	-	-
2R2	2.2	N	N	100KHz, 0.25V	0.095	0.080	0.060	0.150	1.10	1.100	1.48	1.15
3R3	3.3	N	M	100KHz, 0.25V	0.140	0.100	0.080	0.180	0.87	0.910	1.21	1.10
4R7	4.7	N	M	100KHz, 0.25V	0.190	0.130	0.120	0.210	0.75	0.770	1.02	0.90
6R8	6.8	N	M	100KHz, 0.25V	0.300	-	-	0.300	0.61	-	-	0.74
100	10	N	M	1KHz, 0.25V	0.450	0.290	0.230	0.380	0.50	0.540	0.70	0.56
150	15	N	M	1KHz, 0.25V	-	-	-	0.510	-	-	-	0.47
220	22	N	M	1KHz, 0.25V	1.030	0.630	0.520	0.870	0.35	0.375	0.47	0.36
330	33	N	M	1KHz, 0.25V	-	1.030	0.840	1.540	-	0.310	0.39	0.28
470	47	N	M	1KHz, 0.25V	-	1.450	1.340	1.810	-	0.250	0.32	0.24

SDIA0418 / 0520 / 0528 / 0610 Type

Codes	L ( $\mu$ H)	Tolerance	Test Condition	DCR ( $\Omega$ ) max.				IDC (A) max.			
				0418	0520	0528	0610	0418	0520	0528	0610
1R0	1.0	N	100KHz, 0.25V	0.030	-	-	-	4.0	-	-	-
2R2	2.2	N	100KHz, 0.25V	0.060	0.049	0.042	-	2.7	5.2	6.0	-
3R3	3.3	M, N	100KHz, 0.25V	0.070	0.074	-	-	2.0	4.0	-	-
4R7	4.7	M, N	100KHz, 0.25V	0.090	0.098	0.077	0.230	1.7	3.6	4.5	1.8
6R8	6.8	M, N	100KHz, 0.25V	0.110	0.137	-	0.450	1.45	2.9	-	1.6
100	10	M, N	1KHz, 0.25V	0.180	0.205	0.163	0.400	1.20	2.4	3.0	1.4
150	15	M, N	1KHz, 0.25V	0.250	-	-	-	0.94	-	-	-
220	22	M, N	1KHz, 0.25V	0.360	-	0.400	-	0.80	-	1.9	-
330	33	M, N	1KHz, 0.25V	0.530	-	-	-	0.65	-	-	-
470	47	M, N	1KHz, 0.25V	0.650	-	0.854	-	0.57	-	1.5	-
680	68	M, N	1KHz, 0.25V	1.000	-	-	-	0.47	-	-	-
101	100	M, N	1KHz, 0.25V	1.500	-	-	-	0.40	-	-	-
151	150	M, N	1KHz, 0.25V	2.500	-	-	-	0.31	-	-	-
221	220	M, N	1KHz, 0.25V	4.000	-	-	-	0.27	-	-	-
471	220	M, N	1KHz, 0.25V	-	-	7.800	-	-	-	0.4	-

## Electrical Characteristics

SDIA0612 / 0620 / 0628 / 0645 / 0840 Type

Codes	L ( $\mu$ H)	Tolerance	Test Condition	DCR ( $\Omega$ ) max.					IDC (A) max.				
				0612	0620	0628	0645	0840	0612	0620	0628	0645	0840
0R9	0.9	N	100KHz, 0.25V	-	-	0.013	-	-	-	-	6.60	-	-
1R0	1.0	N	100KHz, 0.25V	-	0.026	-	0.014	--	-	6.80	-	8.50	-
1R3	1.3	N	100KHz, 0.25V	-	-	-	0.016	-	-	-	-	8.00	-
1R5	1.5	N	100KHz, 0.25V	-	-	0.016	-	--	-	-	5.00	-	-
1R8	1.8	N	100KHz, 0.25V	-	-	-	0.018	-	-	-	-	7.00	-
2R2	2.2	N	100KHz, 0.25V	0.133	0.049	0.020	-	0.017	3.10	4.70	4.20	-	7.33
2R3	2.3	N	100KHz, 0.25V	-	-	-	0.021	-	-	-	-	6.00	-
3R0	3.0	N	100KHz, 0.25V	-	-	0.023	0.024	-	-	-	3.60	5.00	-
3R3	3.3	M, N	100KHz, 0.25V	-	-	-	-	0.022	-	-	-	-	5.93
4R5	4.5	M	100KHz, 0.25V	-	-	-	0.031	-	-	-	-	4.00	-
4R7	4.7	M, N	100KHz, 0.25V	0.220	0.086	0.031	-	0.023	1.90	2.80	2.70	-	4.70
6R0	6.0	N	100KHz, 0.25V	-	-	0.040	-	-	-	-	2.50	-	-
6R3	6.3	M	100KHz, 0.25V	-	-	-	0.038	-	-	-	-	3.80	-
6R8	6.8	M, N	100KHz, 0.25V	0.280	0.111	-	-	0.033	1.60	2.60	-	-	4.00
100	10	M, N	1KHz, 0.25V	0.430	0.178	0.065	0.047	0.044	1.40	1.90	1.90	3.00	3.40
120	12	M, N	1KHz, 0.25V	-	-	-	-	0.055	-	-	-	-	3.05
150	15	M, N	1KHz, 0.25V	-	-	0.095	0.077	0.065	-	-	1.60	2.30	2.70
220	22	M, N	1KHz, 0.25V	-	-	0.135	0.115	0.086	-	-	1.30	1.90	2.20
330	33	M, N	1KHz, 0.25V	-	-	0.220	0.145	0.130	-	-	1.10	1.50	1.90
470	47	M, N	1KHz, 0.25V	-	-	0.300	0.220	0.200	-	-	0.95	1.30	1.50
680	68	M, N	1KHz, 0.25V	-	-	0.420	0.330	0.300	-	-	0.76	1.00	1.20
101	100	M, N	1KHz, 0.25V	-	-	0.600	0.500	0.380	-	-	0.62	0.80	1.00