


SnPb Termination Multilayer Varistors

Multilayer Varistors with Tin/Lead Termination

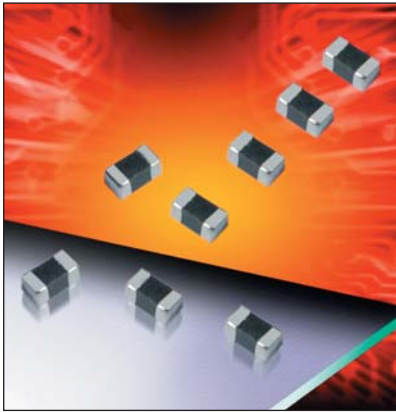

GENERAL DESCRIPTION

AVX designed specific TransGuard® and StaticGuard VCLD series with Sn/Pb termination (5% Pb Min) to support customers that cannot accept pure tin components in their applications. They have the advantage of offering bi-directional overvoltage protection against transient events such as ESD, inductive switching, lightning, NEMP as well as EMI/RFI attenuation in a single SMT package.

GENERAL CHARACTERISTICS

- Operating Temperature: -55°C to +125°C

FEATURES

- Sn/Pb termination (5% Pb min)
- Bi-Directional protection
- Very fast response to ESD strikes
- Multi-strike capability
- Reliability
- EMI/RFI Filtering in the off-state
- Radiation resistant

APPLICATIONS

- IC Protection
- Micro Controllers
- Relays
- I/O Ports
- Keyboard Protection
- Portable devices
- Radios and more

HOW TO ORDER – TRANSGUARD®

VCLD	1206	18	D	400	R	B			
Varistor Leaded Termination (Sn/Pb)	Case Size	Working Voltage	Energy Rating	Clamping Voltage	Packaging	Termination			
	0603 0805 1206 1210	05 = 5.6Vdc 09 = 9Vdc 12 = 12Vdc 14 = 14Vdc 18 = 18Vdc 26 = 26Vdc 30 = 30Vdc 31 = 31Vdc	38 = 38Vdc 42 = 42Vdc 45 = 45Vdc 48 = 48Vdc 56 = 56Vdc 60 = 60Vdc 65 = 65Vdc 85 = 85Vdc	X = 0.05J A = 0.1J C = 0.3J D = 0.4J G = 0.9J F = 0.7J H = 1.2J	J = 1.5J K = 0.6J L = 0.8J M = 1J N = 1.1J S = 1.9-2.0J	150 = 18V 200 = 22V 250 = 27V 300 = 32V 390 = 42V 400 = 42V 540 = 54V 560 = 60V 580 = 60V 620 = 67V	650 = 67V 770 = 77V 800 = 80V 900 = 90V 101 = 100V 111 = 110V 121 = 120V 131 = 135V 151 = 150V	D = 7" (1000) R = 7" (4000 or 2000) T = 13" (10,000)	B = Sn/Pb (5% Pb Min)

Not RoHS Compliant


Sn/Pb termination

HOW TO ORDER – STATIC GUARD

VCLD	06	LC	18	X	500	R	B
Varistor Leaded Termination (Sn/Pb)	Case Size	Low Cap Design	Working Voltage	Energy Rating	Clamping Voltage	Packaging	Termination
	06 = 0603 08 = 0805 12 = 1206		18 = 18Vdc	X = 0.05J A = 0.1J	500 = 50V	D = 7" (1000) R = 7" (4000) T = 13" (10,000)	B = Sn/Pb (5% Pb Min)


Please contact AVX for availability of other varistors with SnPb termination.

PHYSICAL DIMENSIONS: mm (inches)

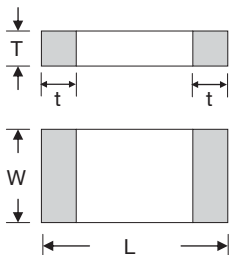

Size (EIA)	Length (L)	Width (W)	Max Thickness (T)	Land Length (t)
0603	1.60±0.15 (0.063±0.006)	0.80±0.15 (0.031±0.006)	0.90 (0.035)	0.35±0.15 (0.014±0.006)
0805	2.01±0.20 (0.079±0.008)	1.25±0.20 (0.049±0.008)	1.02 (0.040)	0.71 max. (0.028 max.)
1206	3.20±0.20 (0.126±0.008)	1.60±0.20 (0.063±0.008)	1.02 (0.040)	0.94 max. (0.037 max.)
1210	3.20±0.20 (0.126±0.008)	2.49±0.20 (0.098±0.008)	1.70 (0.067)	0.14 max. (0.045 max.)

SOLDER PAD DIMENSIONS: mm (inches)



Size (EIA)	D1	D2	D3	D4	D5
0603	2.54 (0.100)	0.89 (0.035)	0.76 (0.030)	0.89 (0.035)	0.76 (0.030)
0805	3.05 (0.120)	1.02 (0.040)	1.02 (0.040)	1.02 (0.040)	1.27 (0.050)
1206	4.06 (0.160)	1.02 (0.040)	2.03 (0.080)	1.02 (0.040)	1.65 (0.065)
1210	4.06 (0.160)	1.02 (0.040)	2.03 (0.080)	1.02 (0.040)	2.54 (0.100)

SnPb Termination Multilayer Varistors

Multilayer Varistors with Tin/Lead Termination

ELECTRICAL CHARACTERISTICS – TRANSGUARD®

AVX PN	V _w (DC)	V _w (AC)	V _B	V _C	I _{VC}	I _L	E _T	I _P	Cap	Freq
VCLD060305A150_B	5.6	4.0	8.5±20%	18	1	35	0.1	30	750	K
VCLD080505A150_B	5.6	4.0	8.5±20%	18	1	35	0.1	40	1100	K
VCLD080505C150_B	5.6	4.0	8.5±20%	18	1	35	0.3	120	3000	K
VCLD120605A150_B	5.6	4.0	8.5±20%	18	1	35	0.1	40	1200	K
VCLD120605D150_B	5.6	4.0	8.5±20%	18	1	35	0.4	150	3000	K
VCLD060309A200_B	9.0	6.4	12.7±15%	22	1	25	0.1	30	550	K
VCLD080509A200_B	9.0	6.4	12.7±15%	22	1	25	0.1	40	750	K
VCLD080512A250_B	12.0	8.5	16.0±15%	27	1	25	0.1	40	525	K
VCLD060314A300_B	14.0	10.0	18.5±12%	32	1	15	0.1	30	350	K
VCLD080514A300_B	14.0	10.0	18.5±12%	32	1	15	0.1	40	325	K
VCLD080514C300_B	14.0	10.0	18.5±12%	32	1	15	0.3	120	900	K
VCLD120614A300_B	14.0	10.0	18.5±12%	32	1	15	0.1	40	600	K
VCLD120614D300_B	14.0	10.0	18.5±12%	32	1	15	0.4	150	1050	K
VCLD060318A400_B	18.0	13.0	25.5±10%	42	1	10	0.1	30	150	K
VCLD080518A400_B	18.0	13.0	25.5±10%	42	1	10	0.1	30	225	K
VCLD080518C400_B	18.0	13.0	25.5±10%	42	1	10	0.3	100	550	K
VCLD120618A400_B	18.0	13.0	25.5±10%	42	1	10	0.1	30	350	K
VCLD120618D400_B	18.0	13.0	25.5±10%	42	1	10	0.4	150	900	K
VCLD121018J390_B	18.0	13.0	25.5±10%	42	5	10	1.5	500	3100	K
VCLD060326A580_B	26.0	18.0	34.5±10%	60	1	10	0.1	30	155	K
VCLD080526A580_B	26.0	18.0	34.5±10%	60	1	10	0.1	30	120	K
VCLD080526C580_B	26.0	18.0	34.5±10%	60	1	10	0.3	100	250	K
VCLD120626D580_B	26.0	18.0	34.5±10%	60	1	10	0.4	120	500	K
VCLD120626F540_B	26.0	20.0	33.0±10%	54	1	15	0.7	200	600	K
VCLD121026H560_B	26.0	18.0	34.5±10%	60	5	10	1.2	300	2150	K
VCLD060330A650_B	30.0	21.0	41.0±10%	67	1	10	0.1	30	125	K
VCLD080530A650_B	30.0	21.0	41.0±10%	67	1	10	0.1	30	90	M
VCLD080530C650_B	30.0	21.0	41.0±10%	67	1	10	0.3	80	250	K
VCLD120630D650_B	30.0	21.0	41.0±10%	67	1	10	0.4	120	400	K
VCLD121030G620_B	30.0	21.0	41.0±10%	67	5	10	0.9	220	1750	K
VCLD121030H620_B	30.0	21.0	41.0±10%	67	5	10	1.2	280	1850	K
VCLD080531C650_B	31.0	25.0	39.0±10%	65	1	10	0.3	80	250	K
VCLD120631M650_B	31.0	25.0	39.0±10%	65	1	15	1.0	200	500	K
VCLD080538C770_B	38.0	30.0	47.0±10%	77	1	10	0.3	80	200	K
VCLD120638N770_B	38.0	30.0	47.0±10%	77	1	15	1.1	200	400	K
VCLD120642L800_B	42.0	32.0	51.0±10%	80	1	15	0.8	180	600	K
VCLD120645K900_B	45.0	35.0	56.0±10%	90	1	15	0.6	200	260	K
VCLD120648D101_B	48.0	34.0	62.0±10%	100	1	10	0.4	100	225	K
VCLD121048G101_B	48.0	34.0	62.0±10%	100	5	10	0.9	220	450	K
VCLD121048H101_B	48.0	34.0	62.0±10%	100	5	10	1.2	250	500	K
VCLD120656F111_B	56.0	40.0	68.0±10%	110	1	15	0.7	100	180	K
VCLD121060J121_B	60.0	42.0	76.0±10%	120	5	10	1.5	250	400	K
VCLD120665M131_B	65.0	50.0	82.0±10%	135	1	15	1.0	150	250	K
VCLD121085S151_B	85.0	60.0	100±10%	150	1	35	2.0	250	275	K

ELECTRICAL CHARACTERISTICS – STATICGUARD

AVX PN	V _w (DC)	V _w (AC)	V _B	V _C	I _{VC}	I _L	E _T	I _P	Cap	Case
VCLD06LC18X500_B	≤18	≤14	25-40	50	1	10	0.05	30	50 ^M	0603
VCLD08LC18A500_B	≤18	≤14	25-45	50	1	10	0.1	30	80 ^M	0805
VCLD12LC18A500_B	≤18	≤14	25-45	50	1	10	0.1	30	200 ^K	1206

V_w(DC) DC Working Voltage (V)
V_w(AC) AC Working Voltage (V)
V_B Min-Max Breakdown Voltage (V @ 1mA_{DC}, 25°C)
V_C Clamping Voltage (V @ I_{VC})
I_{VC} Test Current for V_C (A, 8x20μS)
I_L Maximum Leakage Current at the Working Voltage (μA, 25°C)

E_T Transient Energy Rating (J, 10x1000μS)
I_P Peak Current Rating (A, 8x20μS)
Cap Typical Capacitance (pF) @ frequency specified and 0.5 V_{RMS},
25°C, K = 1kHz, M = 1MHz